
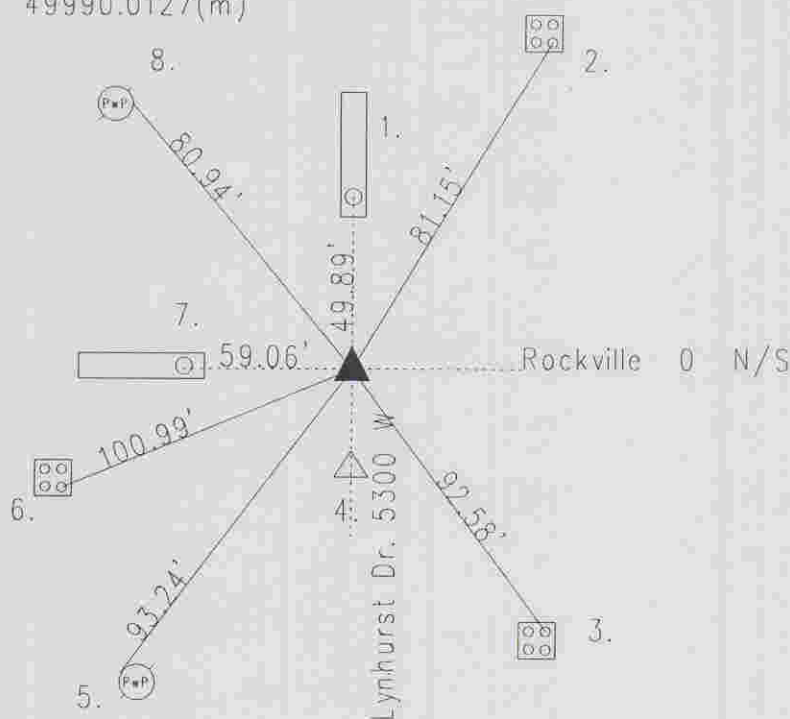


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 12 TOWNSHIP 15 RANGE 2  
DATE: 2-25-05  
PARTY CHIEF: Wilcoxen  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County 5-4-00

IN. S.P.C. E ZONE NAD '83  
NAME: 15021203  
N: 501610.4056(m)  
E: 49990.0127(m)

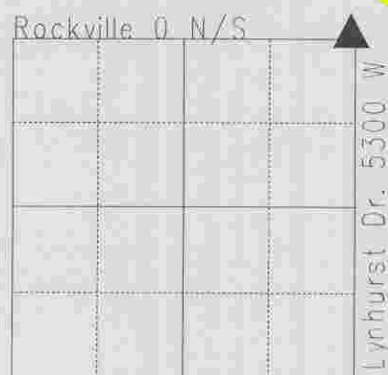

Original set 1820 by Laughlin with witness: 13" beech N 31 W 20 links, 12" sugar N 21 E 18 links, post set per Marion County Atlas pg. 2. Mayhew called rock with witness: 30" elm stump S 16 E 71 links. 1-5-47 MCSO called axle. 12-10-57 Schultz called round disk. 3-15-58 Monroe called steel pin. 7-15-77 Wilcoxen called PK nail. 8-15-86 Greene called PK. 9-19-90 excavated Harrison set in accordance with construction plans of Rockville Road Project. Re-tied 11-25-95 by Wilcoxen. Re-tied 5-4-2000 by Kiste. Re-tied 2-25-05 by Wilcoxen. 15021203

REF.	DISTANCE	DESCRIPTION
1.	49.89	Due N to S edge of hole w/PVC pipe in median
2.	81.15'	Cut 'x' SF bolt of traffic signal base
3.	92.58'	Cut 'x' NF bolt of traffic signal base
4.	5.40'	Due S to NW corner of 7-15-3 (Harrison)
5.	93.24'	PK nail NW PwP#599-525B 12"up
6.	100.99'	Cut 'x' SF bolt of traffic signal base
7.	59.06'	Due W to F edge hole w/PVC pipe in median
8.	80.94'	Mag nail w/brass washer F PwP#25-529 A 12"up